TechniSat®
DIGITAL
DAS ORIGINAL

TechniFon i1 USB Phone

CERTIFIED USB™

driver
Phoning via the internet for free[1)]

WWW
VoIP phone

integrated soundcard

TechniFon i1 USB Phone User Manual

1) Phoning via the internet for free. To use Technisat TechniFon i1 you need to have access to the internet, with possible additional costs arising.

Please read this first!

Before starting the use of the device, please check whether the delivery is complete. The following items are included:
1 TechniFon i1 USB Phone, 1 USB Connecting Cable, 1 CD-ROM, 1 Connecting Cable TechniFon / Receiver, 1 Guarantee Card, 1 Installation Guide

If any of these items are missing or appear to be damaged, please contact your dealer or call our technical support immediately.

Safety instructions

For your own protection read the safety instructions carefully before starting to use your new device.The manufacturer is not liable to damage caused by improper handling or by disregarding the safety instructions.

- Do not use the device near radiators, stoves or other heat sources.
- Protect your device from splash water and do not use it in rooms with high air humidity.
- Use the device in moderate climate only
- Never open the device! There is danger of an electric shock. Repairs should be carried out by qualified personal only.
- In the following cases disconnect the device from power and contact a specialist:
- the power supply cord or the connector is damaged
- the device was exposed to humidity or fluid got into the device
- in case of considerable malfunctions
- in case of considerable external damage

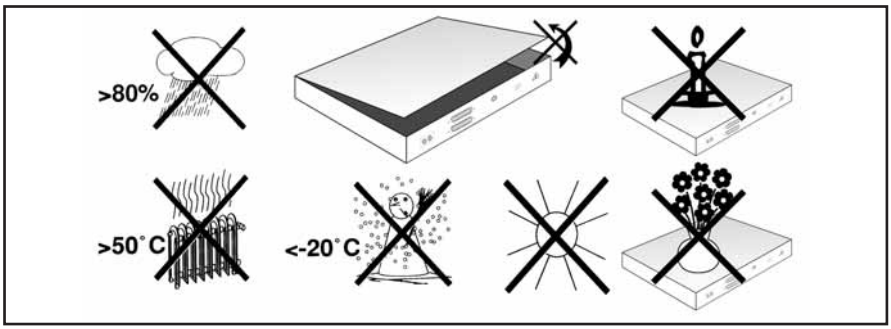

Content:

Connecting the cables 4

Software installation . . . . . .5 - 7

VoIP software support by various providers 8

Activating Drivers for the provider Skype 9

Configuration of the TechniFon i1 for Skype 10

Using TechniFon i1 with Skype . . . . . .12 - 14

Troubleshooting 15

Disposal notes 16

System requirements:

- Pentium III 800 MHz, 256 MB Ram
- Windows 2000 or Windows XP
- 20 MB free hard-disk space
- CD-ROM drive for the installation
- One free USB-Port
- Internet connection

Connecting the cables:

USB handset USB base station USB cable handset cable

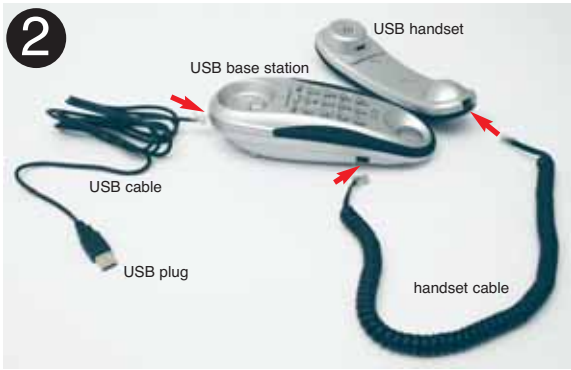

Software-Installation

Enclosed to your TechniFon i1 you will find a CD.
Please insert this CD into your CD-ROM drive. In the appearing window you can either choose to install the driver or to open the manual.
If this window does not start automatically, you can start the setup file manually from the folder “TechniFon i1” on the CD.

Figure 1

TechniFon i1 USB Phone Treiber
Willkommen beim Setup-Assistenten von TechniFon i1 USB Phone Treiber
The installer will guide you through the steps required on your computer.
WARNUNG: Dieses Programm ist durch US-amerikanische Urheberrechtsgesetze und internationale Urheberrechtsverträge geschützt. Unbefugte Vervielfältigung oder unbefugter Vertrieb dieses Programms oder eines Teils davon wird sowohl straf- als auch zivilrechtlich verfolgt und kann schwere Strafen und Schadenersatzforderungen zur Folge haben.
Abbrechen
< Zurück
Weiter >

(Figure 2)

Clicking the button “Weiter” in Figure 2 takes you to Figure 3. There you can specify the folder where the drivers should be installed. (You can type the folder into the textbox or choose a folder from your hard drive by clicking the button “Durchsuchen”.)

In the lower part of the window you can choose whether the drivers should be installed for all users on your computer (“Alle Benutzer”) or only for you (“Aktueller Benutzer”).

TechniFon i1 USB Phone Treiber
Installationsordner wählen
Der Installer wird TechniFon i1 USB Phone Treiber in folgendem Ordner installieren.
Um in diesen Ordner zu installieren, klicken Sie auf "Weiter". Um in einem anderen vorhandenen Ordner zu installieren, geben Sie diesen ein oder klicken Sie auf "Durchsuchen".
Ordner:
C:\Programme\USB Phone\
Durchsuchen...
Speicherplatzbedarf...
Installieren Sie TechniFon i1 USB Phone Treiber nur für den aktuellen Benutzer oder für alle Benutzer dieses Computers:
Alle Benutzer
Aktueller Benutzer
Abbrechen
< Zurück
Weiter >
Figure 3 - Confirm your inputs / choices by clicking the “Weiter” button.

TechniFon i1 USB Phone Treiber
TechniFon i1 USB Phone Treiber wird installiert
TechniFon i1 USB Phone Treiber wird installiert.
Vorgang wird ausgeführt...
Abbrechen
Figure 4 - Process of installation (progress bar)

If you see Figure 5, the installation process has been successfully completed. Click the “Schließen” button.

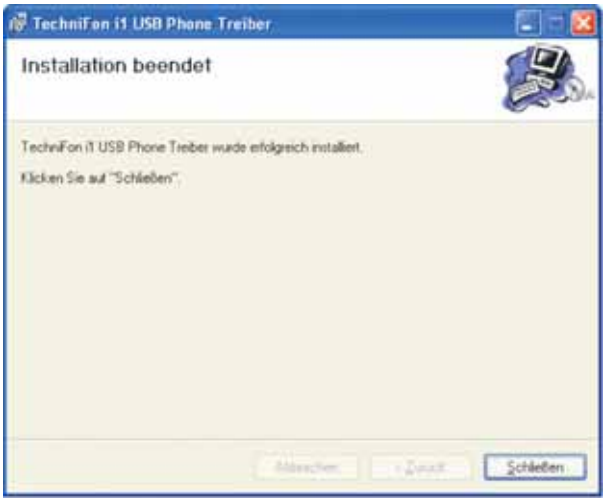
TechniFon i1 USB Phone Treiber
Installation beendet
TechniFon i1 USB Phone Treiber wurde erfolgreich installiert.
Klicken Sie auf "Schließen".
Schließen
Figure 5

TechniFon i1 USB Phone Treiber
Sie müssen den Computer neu starten, damit die geänderte Konfiguration von TechniFon i1 USB Phone Treiber wirksam wird. Klicken Sie auf "Ja", um den Computer jetzt neu zu starten, oder auf "Nein", um den Computer später manuell neu zu starten.
Ja
Nein
Figure 6

Choose “Ja” to restart your computer now or “Nein” to restart later manually.
Note that the computer needs to be restarted before you can start using your TechniFon i1.After restarting your computer you can connect the TechniFon i1 to a USB-Port of your computer.

VoIP software support by various providers

Using the TechniFon i1 USB Phone with appropriate VoIP Software, so-called “Soft-Phones”, you can communicate via internet with other users all over the world, no matter where you are. For software download and getting more information about supported soft-phones please visit the websites of the providers.

Skype:

http://www.skype.com

MSN Messenger:

http://messenger.msn.com

SJPhone:

http://www.sjlabs.com

X-Lite:

http://www.globalipphones.com

Net2phone:

http://web.net2phone.com

eyeBeam:

http://softphones.globaliptel.com

In the following you will find instructions on how to configure your TechniFon i1 USB Phone for Skype. For this reason Skype needs to be installed on your computer and you have a user account. If you don’t know how to do this you will find instructions at http://www.skype.com.

Activating Drivers for the provider Skype

Plug your TechniFon i1 USB Phone into the USB port of your PC.

Once Skype, Net2phone, MSN Messenger, SJ phone or X-Lite has been installed, your TechniFon i1 USB Phone is activated.

An icon will appear on the bar at the right bottom of the screen:

Figure 7

By double click the red marked icon on Figure 7 the following program window pops up:

Figure 8 - Select Skype

As soon as Skype is started the phone driver will ask you for access rights to Skype. Allow the program full access rights.

Now login to your Skype account.

Skype
Anwendungsfreigabe
Eine Anwendung versucht auf Skype zuzugreifen. Sicherheitsrisiko!
Was möchten Sie tun?
USB Name: TechniFon i1 USB Phone Driver.exe
Zugriff auf Skype erlauben
Zugriff auf Skype erlauben, aber jedes Mal nachfragen
Zugriff auf Skype nicht erlauben und blockieren
Was bedeutet das?
OK

Figure 9

Possible choices:

- Zugriff auf Skype erlauben (admit full access rights to Skype)
- Zugriff auf Skype erlauben, aber jedes Mal nachfragen (admit full access rights to Skype, but ask again on every startup)
- Zugriff auf Skype nicht erlauben und blockieren

Select your user account and login.

Setup the TechniFon i1 for Skype

To telephone with your TechniFon i1 you have to ensure that the phone is installed as I/O device in your Skype audio device settings.

Please follow these steps:

1. Click on “Aktionen” and select “Optionen”
2. Click on “Audiogeräte” on the left side of the menu
3. Set up the options as shown in figure 10

   Mark 1 sets the Phone as audio input device

   Mark 2 sets the Phone as audio output divece

   Mark 3 will use the speakers of your PC additionally to the one of the phone itself when the phone rings.

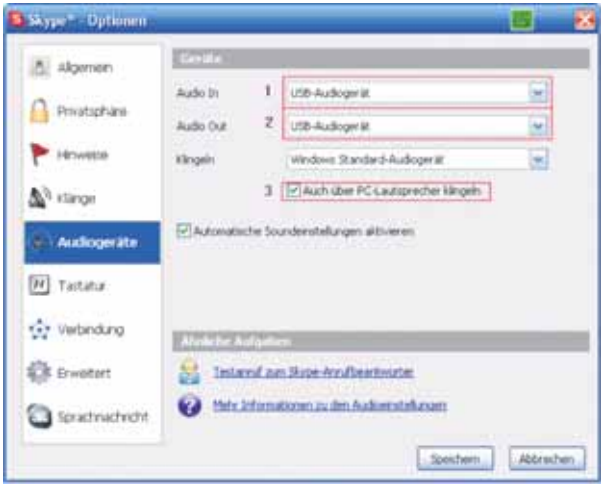

Figure 10

4. Now Click on “Tastatur” on the left side of the menu

5. Activate the shortcuts as shown in figure 11 (red marked)

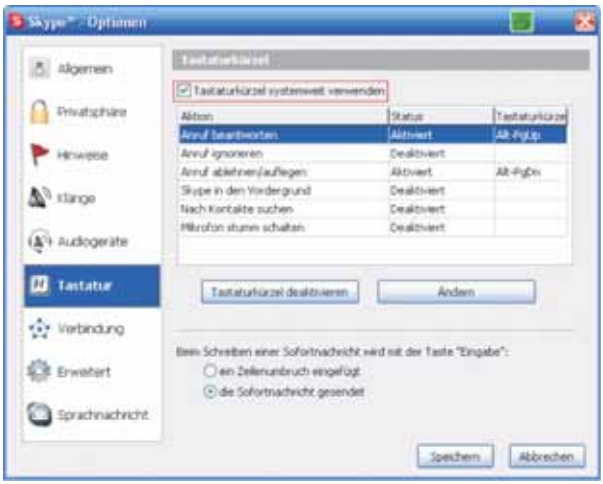

Figure 11

6. Save configuration by clicking the “Speichern” button.

Using TechniFon i1 with Skype

If you want to make a call, your contact list will appear automatically.

Figure 12

Press the [Down] button to scroll the contact list. To get back to the top, press the [Down] button for 2 seconds..

Interact with other Skype-users

1. Call someone on the contact list:

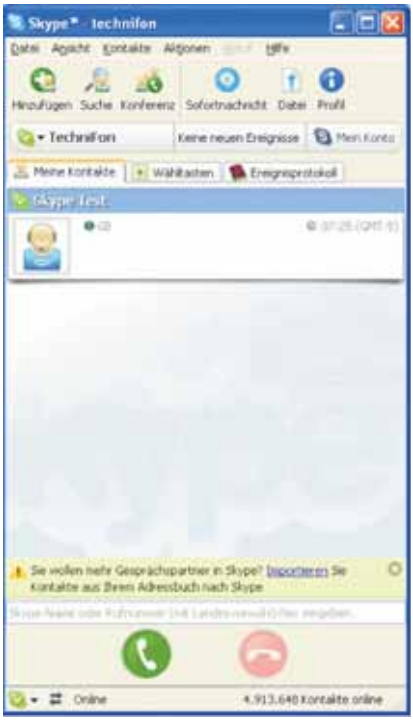

Figure 13

Select the name you want to call and press the [OK] button. The call will be initiated. To terminate the call, just ring off.

2. How to answer the phone

To answer the phone, lift up the handset. To end the call, just ring off.

Make a call via landline:

Please note:
To use Skype for landline calls and to be able to be contacted by phone, you need a valid account at Skype. Please find more information at http://www.skype.com/int/de/.

Lift up the receiver handset and press the [Start] button to move to the tab “Wähltasten”.

Figure 14

Enter the number by pressing the buttons on the phone or clicking on the buttons in the program (you can also press the buttons on the keypad like dialling on a common phone).
Press [OK] to dial the number.

Ring off the handset to end the call.

Troubleshooting notes:

Error	Possible Cause	Measures
No sound or only sound from the speakers.	Wrong setup in Windows or the VoIP Software of your provider.	Check the audio setup of the phone in the system preferences of your computer. Check your audio setup in the preferences of your soft phone.
No picture when calling and using a webcam.	Ask the provider of your soft phone (e.g. Skype) whether the webcam you are using is supported.	Check your webcam with its own software to be sure that it works. Use a webcam that is supported by the soft phone of your provider.
No telephone connection possible, but USB drivers and software work correctly.	Firewall or proxy server setup	Change your firewall or proxy server set up as recommended by your soft phone provider.
No calls to the public telephone network or to mobile phones possible.	Not enough credit on your account at your provider.	Recharge your account at your provider.
The soft phone of your provider does not react	USB phone driver software not loaded. Wrong soft-phone provider selected in your USB phone driver.	Start the USB phone driver software. Select the appropriate provider from the USB phone driver list.
The USB phone is not detected as an USB device.	The USB ports of your computer are turned off.	Turn on the USB ports in the BIOS of your computer.

Disposal notes

The packing of this product entirely consists of recyclable materials.

This product must not be disposed as household waste at the end of its lifetime. It has to be brought to a special recycling and collecting point for electronic waste. That is indicated by the symbols on the device, the manual or the packing of the product.

By recycling these materials you help saving our environment.

Please contact your local government to find out nearest collecting point.



CE

This device is approved for the CE signet, and complies with all corresponding EU qualifications.
The information in this documentation may contain errors and/or omissions, for which we disclaim any responsibility. All information is subject to change without notice.
© 04/06
TechniSat is a registered trademark of the TechniSat Digital GmbH.

TechniSat Digital GmbH
Postfach 560
54541 Daun
www.technisat.de

Hotline 0180/5005-910* *0,12 EUR/min. via Deutsche Telekom AG